WANGTREX(HK) TRADING LIMITED


Beverage cylinders are made of 6061 aluminum alloy, with 40% weight reduction than steel cylinders. Special internal and external cleaning processes provide a superior anti-corrosion character, ensuring the food gases are clean and odorless.

Beverage Cylinders (CO2)

Type	Water	Outside	Length	Wall Thickness	Net Weight	Service
	Capacity(L)	Diameter(mm)	(mm)	(mm)	(kg)	Pressure(Mpa)
LWI-60-0.6-15H	0.6	60	332	3	0.8	15
LWI-62-0.8-15H	0.8	62	390	2.9	0.7	15
LWI-75-0.7-15H	0.7	75	295	3.8	0.72	15
LWI-89-0.7-15H	0.7	89	227	4.2	1.1	15
LWI-89-1.0-15H	1	89	287	4.2	1.2	15
LWI-89-1.4-15H	1.4	89	367	4.2	1.5	15
LWI-108-2.0-15H	2	108	328	5.1	1.8	15
LWI-108-2.5-15H	2.5	108	394	5.1	2.1	15
LWI-108-3.0-15H	3	108	490	5.5	2.9	15
LWI-111-2.0-15H	2	111	317	5.2	2.1	15
LWI-111-3.0-15H	3	111	443	5.2	2.8	15
LWI-111-4.0-15H	4	111	568	5.2	3.4	15

LWI-120-2.8-15H	2.8	120	374	5.6	2.5	15
LWI-120-3.2-15H	3.2	120	417	5.6	2.8	15
LWI-140-4.0-15H	4	140	397	6.6	3.7	15
LWI-140-5.0-15H	5	140	476	6.6	4.3	15
LWI-140-6.0-15H	6	140	555	6.6	4.9	15
LWI-140-8.0-15H	8	140	713	6.6	6.1	15
LWI-140-10-15H	10	140	872	6.6	7.3	15
LWI-152-10-15H	10	152	768	7.4	8.46	15
LWI-159-10-15H	10	159	701	7.4	7.8	15
LWI-180-10-15H	10	180	575	8.8	8.2	15
LWI-203-12-15H	12	203	552	9.5	11.8	15
LWI-203-13.4-15H	13.4	203	606	9.5	12.7	15
LWI-203-15-15H	15	203	666	9.5	13.7	15
LWI-203-20-15H	20	203	856	9.5	16.8	15
LWI-232-30-15H	30	232	1236	10.8	23	15
LWI-232-40-15H	40	232	1281	10.8	30	15
LWI-232-50-15H	50	232	1573	10.8	36.4	15
LWI-250-50-15H	50	250	1405	11.7	38.3	15



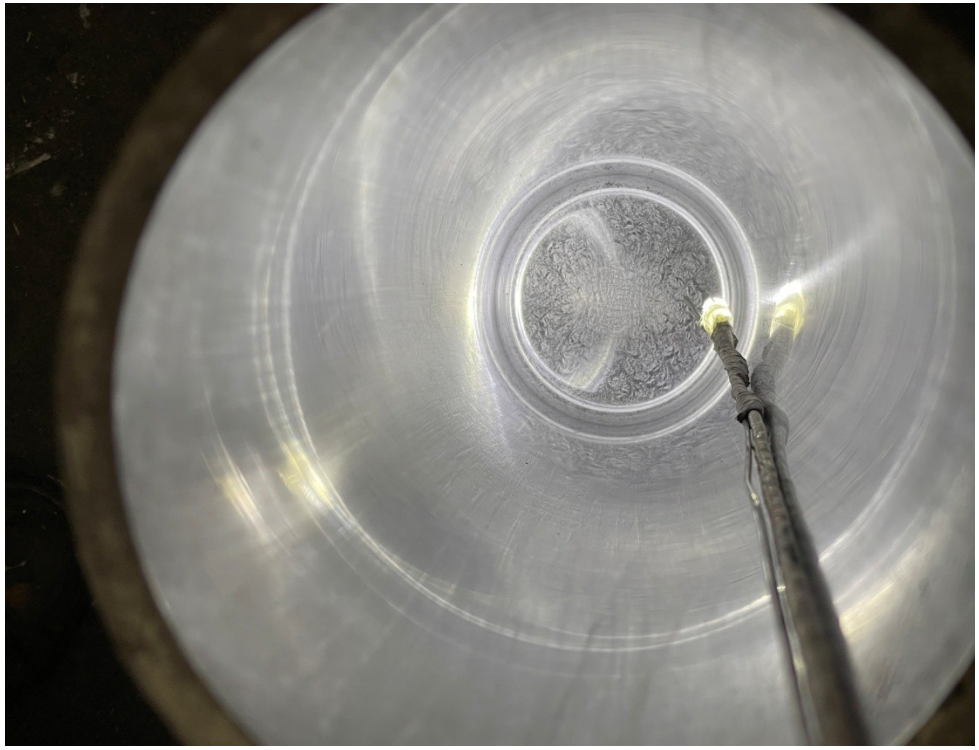

Portable oxygen device is a small instrument for oxygen supply and mainly used for personal health care hospital, plateau oxygen supplement and undermine oxygen supply, etc. The oxygen devices is with simple structure, high reliability, large oxygen storage

and long time for keeping pressure, it is equipped with manometer, pressure reducer and flow indicator. It is made of aluminum alloy, and has a characteristic of anti-corrosion clean surface and high pressure resistant. It provide the user clean, fresh, medical level oxygen without iron rust taste.

Portable Oxygen Devices

Type	Water Capacity	Service Pressure(Mpa)	Oxygenation- Capacity
LGY-0.3-15	0.3	15	45
LGY-0.4-15	0.4	15	60
LGY-0.5-15	0.5	15	75
LGY-0.6-15	0.6	15	90
LGY-0.7-15	0.7	15	105
LGY-1.0-15	1	15	150
LGY-1.4-15	1.4	15	210
LGY-2.0-15	2	15	300
LGY-2.8-15	2.8	15	420
LGY-3.0-15	3	15	450
LGY-3.0-15	3.2	15	480
LGY-4.0-15	4	15	600
LGY-4.6-15	4.6	15	690
LGY-5.0-15	5	15	750
LGY-6.0-15	6	15	900
LGY-8.0-15	8	15	1200

LGY-10.0-15	10	15	1500
LGY-20.0-15	20	15	3000
LGY-30.0-15	30	15	4500
LGY-40.0-15	40	15	6000
LGY-50.0-15	50	15	7500
LGY-0.3-20	0.3	20	60
LGY-0.4-20	0.4	20	80
LGY-0.5-20	0.5	20	100
LGY-0.6-20	0.6	20	120
LGY-0.7-20	0.7	20	140
LGY-2.0-20	2	20	400
LGY-3.0-20	3	20	600
LGY-4.0-20	4	20	800
LGY-5.0-20	5	20	1000
LGY-6.0-20	6	20	1200
LGY-8.0-20	8	20	1600
LGY-11.0-20	11	20	2200
FGY-1.4-20	1.4	20	280
FGY-1.6-20	1.6	20	320
FGY-2.4-20	2.4	20	480
FGY-2.5-20	2.5	20	500
FGY-3.0-20	3	20	600
FGY-6.8-20	6.8	20	1360
FGY-8.5-20	8.5	20	1700
FGY-9.0-20	9	20	1800

FGY-10.0-20	10	20	2000
FGY-12.0-20	12	20	2400